

for Waste Rags and Wipes


Oily Waste Cans

Dispose of oil-soaked rags and prevent fires caused by stray sparks or spontaneous combustion

Rags and cloths soaked with solvents, thinners, linseed oil, combustible adhesives and other flammable liquids present a serious fire risk when improperly discarded. Lid opens to no more than 60 degrees and stays closed when not in use, isolating contents from fire sources and limiting oxygen to virtually eliminate the risk of spontaneous combustion. Round construction and elevated base allow circulation of air around can to disperse heat and reduce moisture build-up and rusting. Durable steel construction with a powder-coat finish provides chemical resistance. Approved by FM, UL, and TÜV. All cans carry a ten-year warranty.

SoundGard™ oily waste cans include a sound muffling pad inside lid to significantly reduce lid-closure noise. Ideal for laboratories or anywhere it is desirable to lessen disruptive noise.

Lid opens no more than a 60° angle as required by UL.

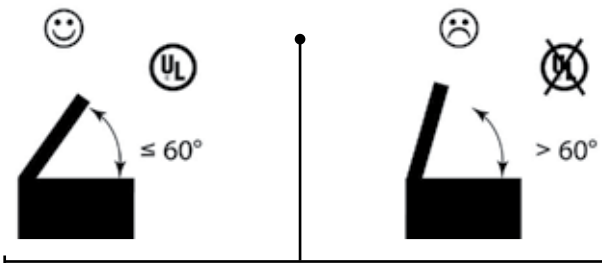

Lid opens no more than a 60° angle as required by UL.



Use colors to identify and segregate different wastes.



09410

09200



09101



09104



09100

09300

09500

09700



Description and Capacity	Dimensions OD x H	Approv/Lstg Regulation	Red Can Model No	WHS	Yellow Can Model No	WHS	Ship Wt kg
Oily Waste Cans							
8 liter countertop oily waste can	244 x 232 mm	FM	09200	A,E	09200Y	—	3.0
20 liter oily waste can with foot-operated cover	302 x 403 mm	FM,UL,TÜV	09100		09101	E	5.0
34 liter oily waste can with foot-operated cover	354 x 464 mm		09300		09301	A,E	
52 liter oily waste can with foot-operated cover	408 x 514 mm		09501		09501	7.0	
80 liter oily waste can with foot-operated cover	467 x 595 mm		09700		09701	E	10.0
SoundGard™ Oily Waste Cans							
			Red	Silver			
1.7 liter mini bench top oily waste can	117 x 165 mm	FM	09410	A,E	—	—	3.0
20 liter oily waste can with foot-operated cover	302 x 403 mm	FM,UL,TÜV	09108		09104	A,E	5.0
34 liter oily waste can with foot-operated cover	354 x 464 mm		09308		09304		